




aerospace
 climate control
 electromechanical
 filtration
 fluid & gas handling
 hydraulics
 pneumatics
 process control
 sealing & shielding



J8 Thermostatic Expansion Valve

Products & Custom Solutions
 Bulletin 10-10-7, October 2010

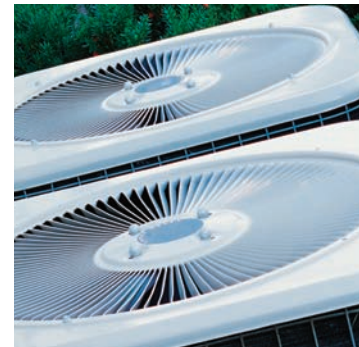

ENGINEERING YOUR SUCCESS.

The J8 Thermostatic Expansion Valve

Introduction

The J8 Thermostatic Expansion Valves are designed to regulate refrigerant flow into evaporators as a response to sensed superheat value. They can be used in a wide range of AC and refrigeration applications.

Features

- Adjustable superheat
- 8 Replaceable orifice assemblies
- Temperature range from -40°C to +15°C
- Thermostatic charges with or without MOP (Maximum Operating Pressure)
- Solder ODF (with inlet connector) or Flare SAE fittings
- Stainless steel thermostatic element
- Copper sensing bulb
- EC compliant (PED & RoHS Compliant)

Technical Specifications


- Maximum bulb temperature: 100°C
- Maximum valve body temperature: 121°C
- Short-lived peak: 149°C
- Maximum working pressure MWP: 34 bar
- Maximum test pressure: 38 bar

J8 valves are supplied as three individual component parts that need to be ordered separately:

- Valve body & Thermostatic element assembly
- Cartridge & Filter assembly
- Inlet ODF adaptor (not mandatory)

Please refer to further sections for selection/ordering information.

J8 Assembly

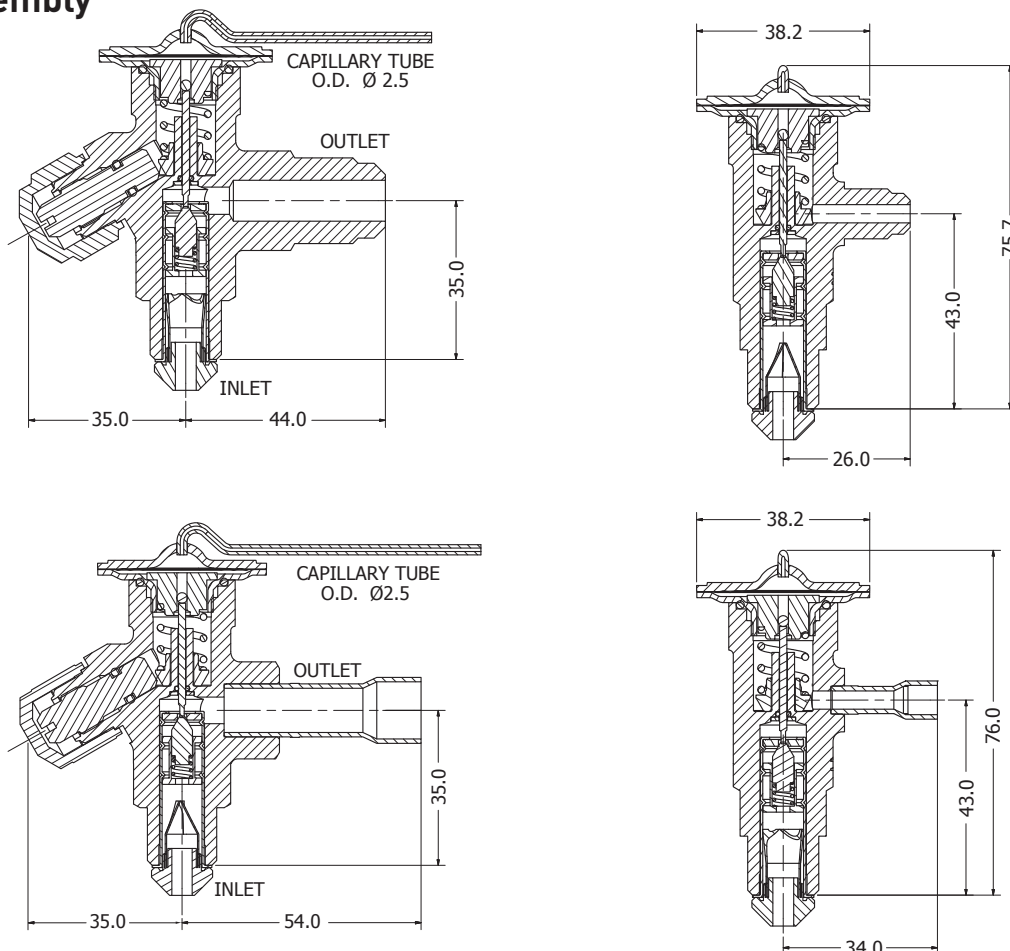

All dimensions in millimeters (mm).


Valve Body & Thermostatic Element Assembly

Valve Type	Refrigerant	Equalizer	Connections		Equalizer	MOP bar / °C	Evaporator Temperature Range °C	Capillary Tube Length cm	
			Inlet	Outlet					
J8EF-NW	407C	External	3/8" SAE	1/2"	1/4"	–	-40°C to +15°C	150	
J8EF-NX100				SAE	SAE	6.9 bar / +17°C			
J8EM-NW				12mm	6mm	–			
J8EM-NX100				ODF	ODF	6.9 bar / +17°C			
J8ES-NW				1/2"	1/4"	–			
J8ES-NX100				ODF	ODF	6.9 bar / +17°C			
J8F-NW		Internal			1/2"				–
J8F-NX100					SAE				6.9 bar / +17°C
J8M-NW					12mm	–			–
J8M-NX100					ODF				6.9 bar / +17°C
J8S-NW					1/2"				–
J8S-NX100					ODF				6.9 bar / +17°C
J8EF-JW	134a	External	3/8" SAE	1/2"	1/4"	–	-40°C to +15°C	150	
J8EF-JX60				SAE	SAE	4.1 bar / +17°C			
J8EM-JW				12mm	6mm	–			
J8EM-JX60				ODF	ODF	4.1 bar / +17°C			
J8ES-JW				1/2"	1/4"	–			
J8ES-JX60				ODF	ODF	4.1 bar / +17°C			
J8F-JW		Internal			1/2"				–
J8F-JX60					SAE				4.1 bar / +17°C
J8M-JW					12mm	–			–
J8M-JX60					ODF				4.1 bar / +17°C
J8S-JW					1/2"				–
J8S-JX60					ODF				4.1 bar / +17°C
J8EF-SW	404A	External	3/8" SAE	1/2"	1/4"	–	-40°C to +10°C	150	
J8EF-SX110				SAE	SAE	7.6 bar / +12°C			
J8EF-SX35						2.4 bar / -17°C			-40°C to -18°C
J8EM-SW				12mm	6mm	–			-40°C to +10°C
J8EM-SX110				ODF	ODF	7.6 bar / +12°C			-40°C to +10°C
J8EM-SX35						2.4 bar / -17°C			-40°C to -18°C
J8ES-SW				1/2"	1/4"	–			-40°C to +10°C
J8ES-SX110				ODF	ODF	7.6 bar / +12°C			-40°C to +10°C
J8ES-SX35						2.4 bar / -17°C			-40°C to -18°C
J8F-SW		Internal			1/2"		–		-40°C to +10°C
J8F-SX110					SAE		7.6 bar / +12°C		-40°C to +10°C
J8F-SX35							2.4 bar / -17°C		-40°C to -18°C
J8M-SW					12mm	–	–		-40°C to +10°C
J8M-SX110					ODF		7.6 bar / +12°C		-40°C to +10°C
J8M-SX35							2.4 bar / -17°C		-40°C to -18°C
J8S-SW					1/2"		–		-40°C to +10°C
J8S-SX110					ODF		7.6 bar / +12°C		-40°C to +10°C
J8S-SX35							2.4 bar / -17°C		-40°C to -18°C

Cartridge & Filter Assembly

Cartridge and Filter Assembly ¹
 Rated Capacities, kW ²

Item	R407C	R134a	R404A
J8C-0X	0.57	0.44	0.45
J8C-00	1.0	0.77	0.79
J8C-01	2.3	1.7	1.6
J8C-02	3.7	3.1	2.8
J8C-03	5.5	4.6	4.2
J8C-04	8.3	6.9	6.3
J8C-05	10.5	8.7	8.0
J8C-06	15.0	10.4	9.6

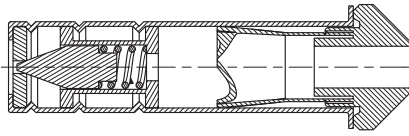

■ The cartridge orifice is stamped with the orifice size, ex. C-0X



■ A metallic tag is provided with each individual cartridge and should be fixed on the cap tube as the orifice is installed in the valves body.

¹ All J8 cartridges are supplied with conical filters. Please contact your Parker Sales Representative in case a flat filter is required.

² The rated capacity is based on the following conditions:


- Evaporating temperature, $T_e = +5^\circ\text{C}$
- Condensing temperature, $T_c = +32^\circ\text{C}$
- Refrigerant temperature ahead of valve, $T_1 = +28^\circ\text{C}$

Inlet ODF Adaptor

All J8 Thermostatic Expansion Valves feature 3/8"SAE inlet fitting. Solder inlet adaptors are available from Parker/Sporlan distributors.


Solder adaptors allow the installation of the J8 TEV and easy access of cartridge orifice & filter assembly. Parker/Sporlan J8 Adaptors have been designed to be used with flare orifice filter.

Item	Description
J8A-6M	J8 Inlet Adaptor 3/8" SAE to 6mm ODF
J8A-10M	J8 Inlet Adaptor 3/8" SAE to 10mm ODF
J8A-2	J8 Inlet Adaptor 3/8" SAE to 1/4" ODF
J8A-3	J8 Inlet Adaptor 3/8" SAE to 3/8" ODF

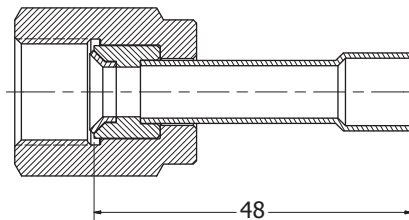

All dimensions in millimeters (mm).

Identification

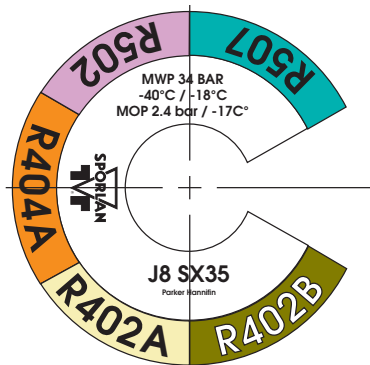

The main information about the valve is provided on the element label:

- Element assembly type J8 SX35
- Refrigerant
- Maximum Working Pressure (MWP) = 34 bar
- Evaporating temperature range in °C = -40°C/-18°C
- Maximum Operating Pressure (MOP) point in bar & °C = MOP 2.4 bar/-17°C
- Manufacturing Date Code

Selection Tables

R407C Capacity Tables (kW)

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature +10°C								
J8C-0X	0.52	0.73	0.90	1.0	1.2	1.3	1.4	1.5
J8C-00	0.91	1.3	1.6	1.8	2.0	2.2	2.4	2.6
J8C-01	1.6	2.2	2.7	3.2	3.5	3.9	4.2	4.5
J8C-02	2.8	4.0	4.9	5.6	6.3	6.9	7.4	7.9
J8C-03	4.2	6.0	7.3	8.4	9.4	10.3	11.2	11.9
J8C-04	6.3	9.0	11.0	12.7	14.2	15.5	16.8	17.9
J8C-05	8.0	11.4	13.9	16.1	18.0	19.7	21.3	22.7
J8C-06	9.6	13.6	16.6	19.2	21.5	23.5	25.4	27.2

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature 0°C								
J8C-0X	0.50	0.71	0.87	1.0	1.1	1.2	1.3	1.4
J8C-00	0.89	1.3	1.5	1.8	2.0	2.2	2.3	2.5
J8C-01	1.5	2.2	2.7	3.1	3.4	3.8	4.1	4.3
J8C-02	2.7	3.9	4.7	5.5	6.1	6.7	7.2	7.7
J8C-03	4.1	5.8	7.1	8.2	9.2	10.1	10.9	11.6
J8C-04	6.2	8.7	10.7	12.3	13.8	15.1	16.3	17.4
J8C-05	7.8	11.1	13.5	15.6	17.5	19.2	20.7	22.1
J8C-06	9.3	13.2	16.2	18.7	20.9	22.9	24.7	26.4

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature -10°C								
J8C-0X	0.48	0.68	0.83	0.96	1.1	1.2	1.3	1.4
J8C-00	0.84	1.2	1.4	1.7	1.9	2.0	2.2	2.4
J8C-01	1.5	2.1	2.5	2.9	3.2	3.6	3.8	4.1
J8C-02	2.6	3.6	4.5	5.2	5.8	6.3	6.8	7.3
J8C-03	3.9	5.5	6.7	7.8	8.7	9.5	10.3	11.0
J8C-04	5.8	8.3	10.1	11.7	13.1	14.3	15.5	16.5
J8C-05	7.5	10.6	13.0	15.0	16.8	18.4	19.9	21.2
J8C-06	8.8	12.5	15.3	17.7	19.8	21.7	23.4	25.0

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature -20°C								
J8C-0X	–	0.61	0.75	0.87	0.97	1.1	1.1	1.2
J8C-00	–	0.93	1.1	1.3	1.5	1.6	1.7	1.9
J8C-01	–	1.7	2.1	2.4	2.7	2.9	3.1	3.4
J8C-02	–	2.8	3.4	4.0	4.4	4.9	5.2	5.6
J8C-03	–	4.5	5.5	6.4	7.1	7.8	8.4	9.0
J8C-04	–	6.4	7.8	9.0	10.1	11.0	11.9	12.7
J8C-05	–	8.5	10.4	12.0	13.4	14.7	15.8	16.9
J8C-06	–	9.8	12.0	13.8	15.5	16.9	18.3	19.6

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature -30°C								
J8C-0X	–	0.54	0.66	0.76	0.85	0.93	1.0	1.1
J8C-00	–	0.69	0.84	0.97	1.1	1.2	1.3	1.4
J8C-01	–	1.3	1.6	1.8	2.1	2.3	2.4	2.6
J8C-02	–	2.0	2.4	2.8	3.1	3.4	3.7	3.9
J8C-03	–	3.6	4.4	5.0	5.6	6.2	6.7	7.1
J8C-04	–	4.4	5.4	6.2	6.9	7.6	8.2	8.8
J8C-05	–	5.8	7.2	8.3	9.2	10.1	10.9	11.7
J8C-06	–	7.0	8.6	10.0	11.1	12.2	13.2	14.1

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature -40°C								
J8C-0X	–	–	0.47	0.54	0.60	0.66	0.71	0.76
J8C-00	–	–	0.59	0.69	0.77	0.84	0.91	0.97
J8C-01	–	–	1.1	1.3	1.5	1.6	1.8	1.9
J8C-02	–	–	1.7	2.0	2.2	2.4	2.6	2.8
J8C-03	–	–	3.1	3.6	4.0	4.4	4.7	5.0
J8C-04	–	–	3.8	4.4	4.9	5.4	5.8	6.2
J8C-05	–	–	5.1	5.9	6.5	7.2	7.7	8.3
J8C-06	–	–	6.1	7.1	7.9	8.6	9.3	10.0

Correction Factor, (CF) Liquid Temperature

TEV corrected capacity = Required Evaporator Capacity / Correction Factor, (CF), for Subcooling.

Subcooling	4K	10K	15K	20K	25K	30K	35K	40K	45K	50K
Correction Factor	1	1.07	1.12	1.18	1.24	1.29	1.34	1.39	1.45	1.51

Selection Tables

R134a Capacity Tables (kW)

Orifice Number	Pressure Drop Across the Valve (bar)				
	2	4	6	8	10
Evaporating Temperature +10°C					
J8C-0X	0.51	0.72	0.89	1.0	1.1
J8C-00	0.90	1.3	1.6	1.8	2.0
J8C-01	1.6	2.2	2.7	3.1	3.5
J8C-02	2.8	3.9	4.8	5.6	6.2
J8C-03	4.2	5.9	7.2	8.3	9.3
J8C-04	6.3	8.9	10.9	12.5	14.0
J8C-05	8.0	11.2	13.8	15.9	17.8
J8C-06	9.5	13.4	16.5	19.0	21.2

Orifice Number	Pressure Drop Across the Valve (bar)				
	2	4	6	8	10
Evaporating Temperature 0°C					
J8C-0X	0.49	0.70	0.86	1.0	1.1
J8C-00	0.87	1.2	1.5	1.7	2.0
J8C-01	1.5	2.1	2.6	3.0	3.4
J8C-02	2.7	3.8	4.7	5.4	6.0
J8C-03	4.0	5.7	7.0	8.1	9.0
J8C-04	6.1	8.6	10.5	12.1	13.5
J8C-05	7.7	10.9	13.3	15.4	17.2
J8C-06	9.2	13.0	15.9	18.4	20.5

Orifice Number	Pressure Drop Across the Valve (bar)				
	2	4	6	8	10
Evaporating Temperature -10°C					
J8C-0X	0.47	0.66	0.81	0.94	1.0
J8C-00	0.82	1.2	1.4	1.6	1.8
J8C-01	1.4	2.0	2.5	2.8	3.2
J8C-02	2.5	3.6	4.4	5.0	5.6
J8C-03	3.8	5.3	6.5	7.6	8.5
J8C-04	5.7	8.1	9.9	11.4	12.7
J8C-05	7.3	10.4	12.7	14.6	16.4
J8C-06	8.6	12.2	14.9	17.2	19.3

Orifice Number	Pressure Drop Across the Valve (bar)				
	2	4	6	8	10
Evaporating Temperature -20°C					
J8C-0X	0.43	0.61	0.75	0.87	0.97
J8C-00	0.66	0.93	1.1	1.3	1.5
J8C-01	1.2	1.7	2.1	2.4	2.7
J8C-02	2.0	2.8	3.4	4.0	4.4
J8C-03	3.2	4.5	5.5	6.4	7.1
J8C-04	4.5	6.4	7.8	9.0	10.1
J8C-05	6.0	8.5	10.4	12.0	13.4
J8C-06	6.9	9.8	12.0	13.8	15.5

Orifice Number	Pressure Drop Across the Valve (bar)				
	2	4	6	8	10
Evaporating Temperature -30°C					
J8C-0X	0.37	0.52	0.64	0.73	0.82
J8C-00	0.47	0.66	0.81	0.93	1.0
J8C-01	0.89	1.3	1.5	1.8	2.0
J8C-02	1.3	1.9	2.3	2.7	3.0
J8C-03	2.4	3.4	4.2	4.8	5.4
J8C-04	3.0	4.2	5.2	6.0	6.7
J8C-05	4.0	5.6	6.9	7.9	8.9
J8C-06	4.8	6.8	8.3	9.6	10.7

Orifice Number	Pressure Drop Across the Valve (bar)				
	2	4	6	8	10
Evaporating Temperature -40°C					
J8C-0X	0.26	0.36	0.45	0.52	0.58
J8C-00	0.33	0.46	0.57	0.66	0.73
J8C-01	0.63	0.89	1.1	1.3	1.4
J8C-02	0.94	1.3	1.6	1.9	2.1
J8C-03	1.7	2.4	3.0	3.4	3.8
J8C-04	2.1	3.0	3.6	4.2	4.7
J8C-05	2.8	4.0	4.8	5.6	6.3
J8C-06	3.4	4.8	5.8	6.7	7.5

Correction Factor, (CF) Liquid Temperature

TEV corrected capacity = Required Evaporator Capacity / Correction Factor, (CF), for Subcooling.

Subcooling	4K	10K	15K	20K	25K	30K	35K	40K	45K	50K
Correction Factor	1	1.07	1.13	1.19	1.24	1.29	1.35	1.4	1.46	1.52

Selection Tables

R404A / R507 Capacity Tables (kW)

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating temperature +10°C								
J8C-0X	0.37	0.53	0.64	0.74	0.83	0.91	1.0	1.1
J8C-00	0.66	0.93	1.1	1.3	1.5	1.6	1.7	1.9
J8C-01	1.1	1.6	2.0	2.3	2.5	2.8	3.0	3.2
J8C-02	2.0	2.9	3.5	4.0	4.5	4.9	5.3	5.7
J8C-03	3.0	4.3	5.2	6.1	6.8	7.4	8.0	8.6
J8C-04	4.6	6.4	7.9	9.1	10.2	11.1	12.0	12.9
J8C-05	5.8	8.2	10.0	11.5	12.9	14.1	15.3	16.3
J8C-06	6.9	9.8	11.9	13.8	15.4	16.9	18.2	19.5

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating temperature 0°C								
J8C-0X	0.36	0.51	0.62	0.72	0.80	0.88	0.95	1.0
J8C-00	0.63	0.89	1.1	1.3	1.4	1.5	1.7	1.8
J8C-01	1.1	1.5	1.9	2.2	2.4	2.7	2.9	3.1
J8C-02	1.9	2.8	3.4	3.9	4.4	4.8	5.1	5.5
J8C-03	2.9	4.1	5.1	5.8	6.5	7.2	7.7	8.3
J8C-04	4.4	6.2	7.6	8.8	9.8	10.7	11.6	12.4
J8C-05	5.6	7.9	9.6	11.1	12.4	13.6	14.7	15.7
J8C-06	6.6	9.4	11.5	13.3	14.9	16.3	17.6	18.8

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating temperature +10°C								
J8C-0X	0.34	0.48	0.59	0.68	0.76	0.83	0.89	0.96
J8C-00	0.59	0.83	1.0	1.2	1.3	1.4	1.6	1.7
J8C-01	1.0	1.4	1.8	2.0	2.3	2.5	2.7	2.9
J8C-02	1.8	2.6	3.1	3.6	4.1	4.4	4.8	5.1
J8C-03	2.7	3.9	4.7	5.5	6.1	6.7	7.2	7.7
J8C-04	4.1	5.8	7.1	8.2	9.2	10.1	10.9	11.6
J8C-05	5.3	7.5	9.1	10.6	11.8	12.9	14.0	14.9
J8C-06	6.2	8.8	10.8	12.4	13.9	15.2	16.4	17.6

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature -20°C								
J8C-0X	0.31	0.44	0.54	0.62	0.69	0.76	0.82	0.88
J8C-00	0.47	0.67	0.82	0.94	1.1	1.2	1.2	1.3
J8C-01	0.85	1.2	1.5	1.7	1.9	2.1	2.3	2.4
J8C-02	1.4	2.0	2.5	2.8	3.2	3.5	3.8	4.0
J8C-03	2.3	3.2	3.9	4.6	5.1	5.6	6.0	6.4
J8C-04	3.2	4.6	5.6	6.4	7.2	7.9	8.5	9.1
J8C-05	4.3	6.1	7.4	8.6	9.6	10.5	11.3	12.1
J8C-06	5.0	7.0	8.6	9.9	11.1	12.1	13.1	14.0

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature -30°C								
J8C-0X	0.26	0.37	0.45	0.52	0.58	0.64	0.69	0.74
J8C-00	0.33	0.47	0.57	0.66	0.74	0.81	0.88	0.94
J8C-01	0.63	0.89	1.1	1.3	1.4	1.5	1.7	1.8
J8C-02	0.94	1.3	1.6	1.9	2.1	2.3	2.5	2.7
J8C-03	1.7	2.4	3.0	3.4	3.8	4.2	4.5	4.9
J8C-04	2.1	3.0	3.7	4.2	4.7	5.2	5.6	6.0
J8C-05	2.8	4.0	4.9	5.6	6.3	6.9	7.5	8.0
J8C-06	3.4	4.8	5.9	6.8	7.6	8.3	9.0	9.6

Orifice Number	Pressure Drop Across the Valve (bar)							
	2	4	6	8	10	12	14	16
Evaporating Temperature -40°C								
J8C-0X	–	0.26	0.31	0.36	0.41	0.44	0.48	0.51
J8C-00	–	0.33	0.40	0.46	0.52	0.56	0.61	0.65
J8C-01	–	0.63	0.77	0.89	0.99	1.1	1.2	1.3
J8C-02	–	0.93	1.1	1.3	1.5	1.6	1.7	1.9
J8C-03	–	1.7	2.1	2.4	2.7	2.9	3.2	3.4
J8C-04	–	2.1	2.6	2.9	3.3	3.6	3.9	4.2
J8C-05	–	2.8	3.4	3.9	4.4	4.8	5.2	5.6
J8C-06	–	3.3	4.1	4.7	5.3	5.8	6.3	6.7

Correction Factor, (CF) Liquid Temperature

TEV corrected capacity = Required Evaporator Capacity / Correction Factor, (CF), for Subcooling.

Subcooling	4K	10K	15K	20K	25K	30K	35K	40K	45K	50K
Correction Factor	1	1.1	1.18	1.26	1.34	1.41	1.49	1.56	1.64	1.71

**European Product
Information Centre**
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES,
FI, FR, IE, IL, IS, IT, LU, MT, NL,
NO, PT, SE, SK, UK)



Parker Hannifin Ltd
Climate and Industrial Controls Group
Refrigeration and Air Conditioning Europe
Cortonwood Drive, Brampton
South Yorkshire S73 0UF
United Kingdom
phone +44 (0) 1226 273400
fax +44 (0) 1226 273401
www.parker.com/race